



Features & Benefits



1. High performance and reputable brand led chips and driver
2. Clear polycarbonate lens with no risk of lamp breaking for safe industry applications
3. Optimized aluminum alloy housing design for superior thermal management
4. Instant light up with no warm up time
5. No cool down needed before restart
6. High mechanical impact resistance and ingress protection rating
7. No dust and easier apply to food industry

Options



1. Safety rope
2. 1-10V Dimming
3. 60/90/110 degree lens
4. Adjustable mounting bracket





Dimensions



100W




150W

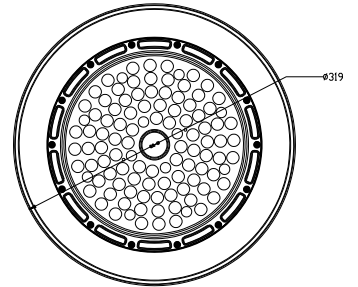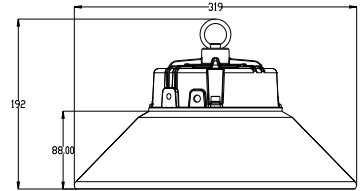


200W


Photometry

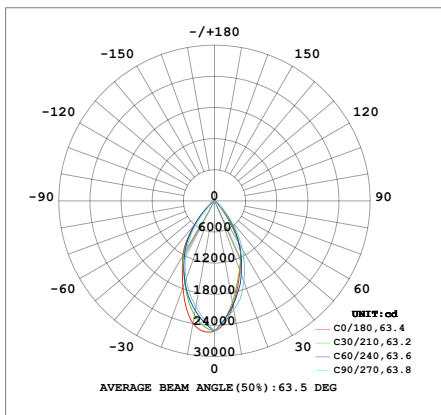

60°

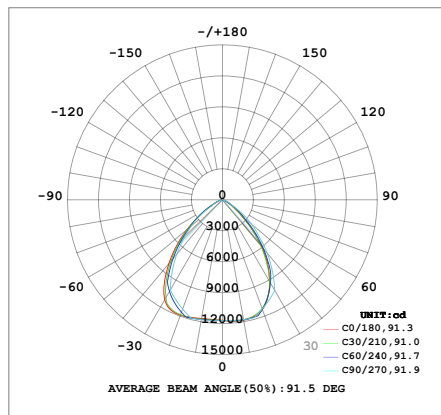

90°

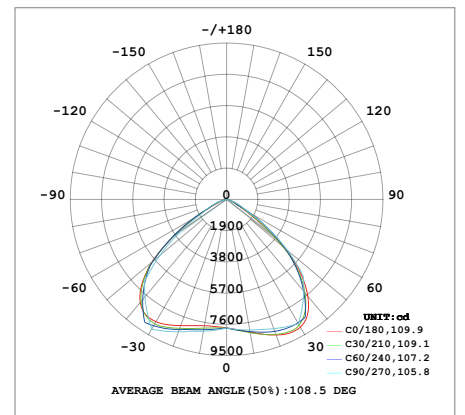

110°

Specifications

- Power Consumption: 100-200W
- Luminous Flux: 14,000lm to 30,000lm
- Input Voltage: 100-277V~
- Color Temperature: 2700 - 6500K
- IP and IK Rating: IP65 and IK08
- Colour Rendering Index (Ra): 80+
- L70 lumen maintenance: >50, 000 hours
- Power factor: >0.95
- Warranty: 5 years
- Operation Temperature Range: -30°C to+50°C

Ordering Information

Part No	Power	CCT	Flux	Dimming	Diameter	Height	Beam Angle
ISL-UFO-C100W	100W	2700-6500K	14,000-15,000lm	NO	278mm	154mm	60/90/110°
ISL-UFO-C150W	150W	2700-6500K	21,000-25,500lm	NO	300mm	172mm	60/90/110°
ISL-UFO-C200W	200W	2700-6500K	28,000-30,000lm	NO	319mm	192mm	60/90/110°

Model	Carton Size	N.W	G.W	QTY
ISL-UFO-A100W	320*320*180mm	2.0KG	2.5KG	1PCS
ISL-UFO-A150W	340*340*190mm	2.8KG	3.5KG	1PCS
ISL-UFO-A200W	380*380*210mm	3.8KG	4.5KG	1PCS

Telephone: +86-0755-29815402

Email: info@ishinelux.com