



Features & Benefits

1. High performance and reputable brand LED chips and driver
2. Clear tempered glass decrease risk of lamp breaking for strong industrial applications
3. Optimized aluminum alloy housing design for superior thermal management
4. Instant light up with no warm up time
5. No cool down needed before restart
6. High mechanical impact resistance and ingress protection rating
7. Compact in size and easy for transportation

Options

1. Housing color and glass color
2. Length wire and special plug
3. Dimming 0-10V, 1-10V, DALI


Follow us





Key Features



Straight fin structure with pillars, greatest heat dissipation




Rubber Cushion, dustproof




304 stainless steel screw, corrosion resistant treatment, suitable for coastal area



Hem corner, strengthen stability




Galvanized bracket, corrosion resistant




Breather Valve, balance the internal and external pressure and humidity




Photometry

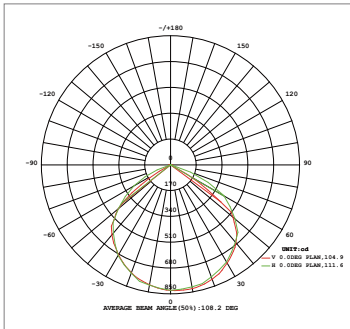


10W

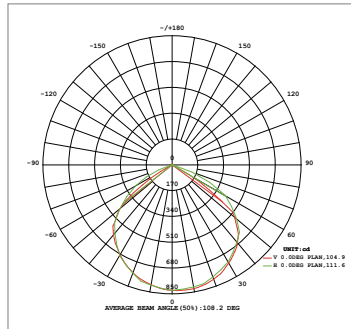


20W

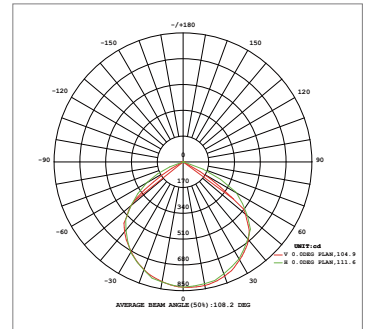


30W

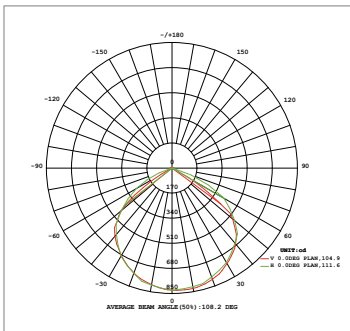

50W



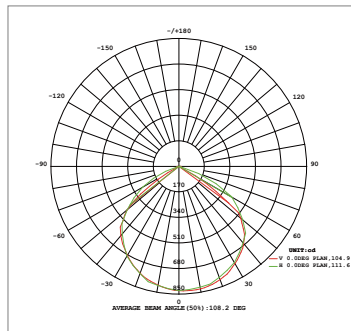


100W

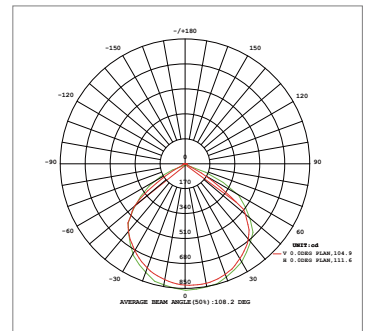


200W

Installation





Dimension Drawing

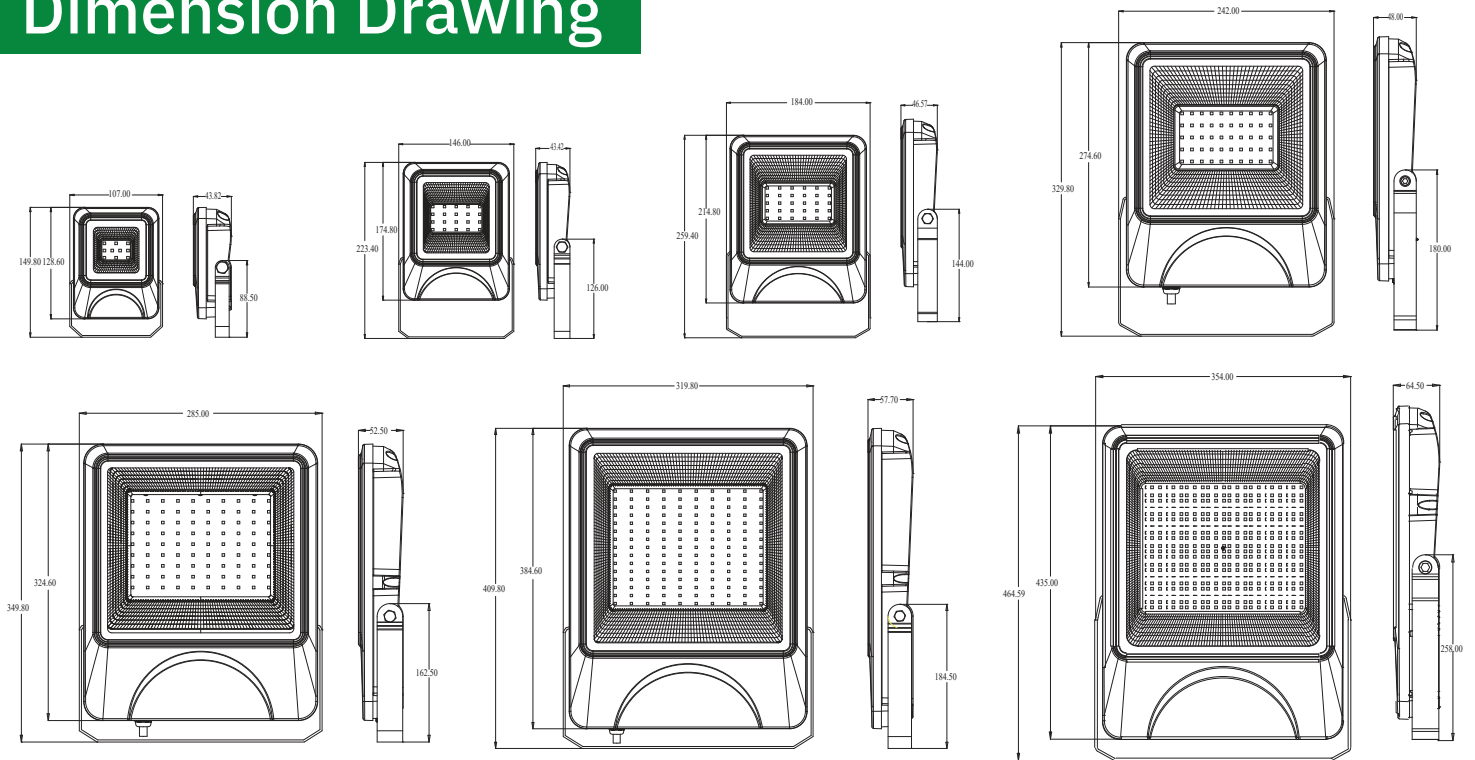


Specification

Model	ISL-XTGD-010A	ISL-XTGD-020A	ISL-XTGD-030A	ISL-XTGD-050A	ISL-XTGD-0100A	ISL-XTGD-0150A	ISL-XTGD-0200A
Rated Power	10W	20W	30W	50W	100W	150W	200W
Input Voltage	AC100-277V						
Chip	Osram						
Driver	ZH / Sosen / Meanwell						
CRI	80						
LED QTY	12 pcs	28 pcs	40 pcs	68 pcs	140 pcs	208 pcs	280 pcs
Luminous Efficacy	120-130lm/W						
IP Rating	IP66						
Operation Temperature	-20~+50℃						
Beam Angle	120°						
Warranty	3 / 5 years						
Dimension	129*99*44mm	175*135*44mm	215*175*47mm	275*225*48mm	325*275*53mm	385*305*58mm	465*354*65mm



Package

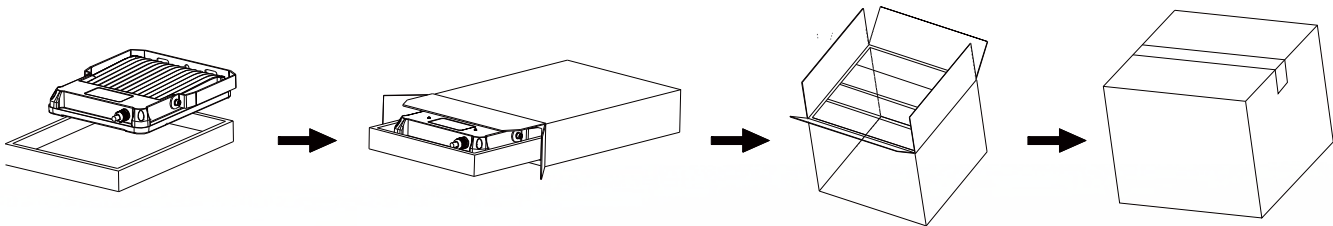

Model	Carton Size	N.W	G.W	QTY
ISL-XTGD-10W	570*375*175mm	16KG	18KG	30PCS/CTN
ISL-XTGD-20W	600*335*215mm	17.5KG	19KG	40PCS/CTN
ISL-XTGD-30W	620*330*250mm	22.5KG	23.1KG	15PCS/CTN
ISL-XTGD-50W	525*37*315mm	21.5KG	22.7KG	10PCS/CTN
ISL-XTGD-100W	450*325*383mm	20.25KG	21KG	5PCS/CTN
ISL-XTGD-150W	372*362*448mm	20.8KG	21.3KG	4PCS/CTN
ISL-XTGD-200W	388*290*490mm	21.3KG	21.8KG	3PCS/CTN

Telephone: +86-0755-29815402

Email: info@ishinelux.com

Tel: 0755-29875402 Fax: 0755-29875719

Web: www.ishinelux.com/ALL right reserved.specifications are subject to change without prior notice.

Add: 7F,building AB,HongLianying Tech. Park, Longhua District, shenzhen, Guangdong 518000, China